

Description of KEPServerEX device ID 192.168.111.116,1,[1,2,8,1,2,2,15,1],1.A.2

**192.168.111.116** = 1756-ENBT module of Device A

**,1** = Port # of the 1756-ENBT module where you gain access to the Back plane of the ControlLogix PLC (see port reference key)

**,1** = Onto Slot 1 of Device A (1756-DHRIO module)

**,2** = Out of Port 2 of the 1756-DHRIO module in Device A, where Channel A = Port 2 (see port reference key)

**,8** = Into Node 8 of Device B

**,1** = Port # of the 1756-DHRIO module where you gain access to the Back plane of the ControlLogix PLC (see port reference key)

**,2** = Onto Slot 2 of Device B (1756-CNB module)

**,2** = Out of Port 2 of the 1756-CNB module


**,15** = Into Node 15 of Device C

**,1** = Port # of the 1756-CNB where you gain access to the Back plane of the ControlLogix PLC (see port reference key)

**,1** = Onto Slot 1 of Device C (1756-DHRIO module)

**.A** = Out of Channel A of the 1756-DHRIO module in Device C

**.2** = Node # of Target Device (see Target Device description)

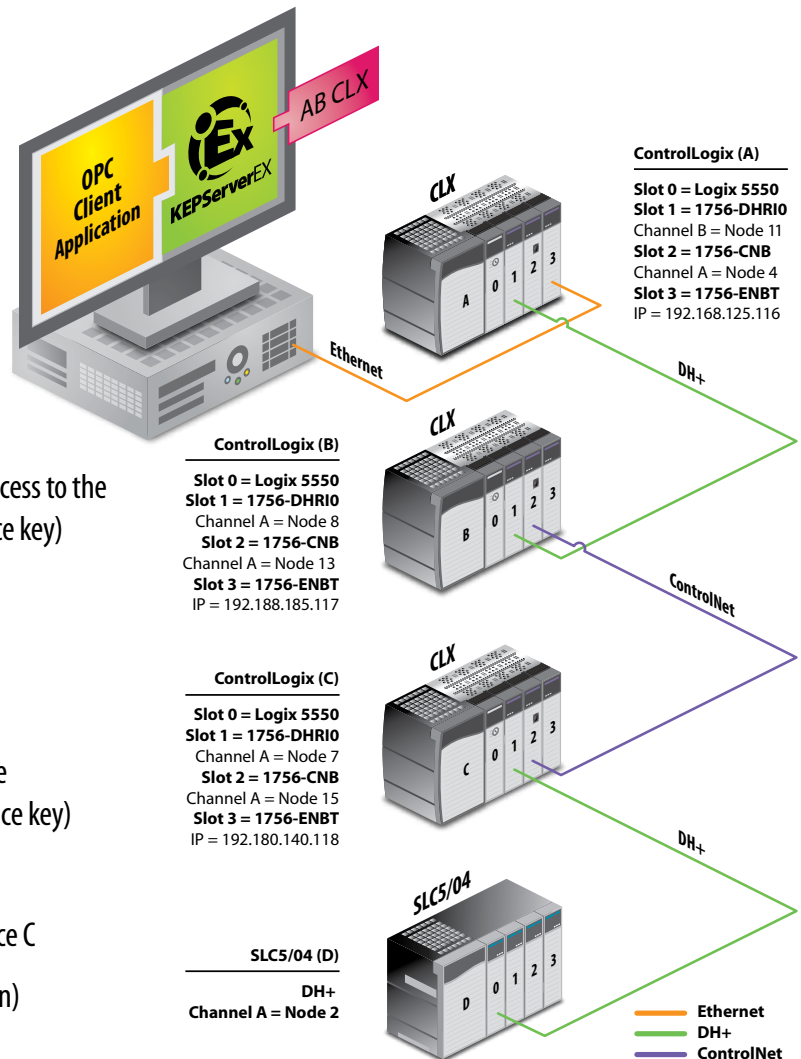

INTERFACE MODULE	PORT 1	PORT 2	PORT 3
1756-ENBT	Back plane	Ethernet Network	N/A
1756-DHRIO	Back plane	DH+ Network on Channel A	DH+ Network on Channel B
1756-CNB	Back plane	ControlNet Network	N/A
SoftLogix EtherNet/IP Messaging	Virtual Back plane	Ethernet Network	N/A